



RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

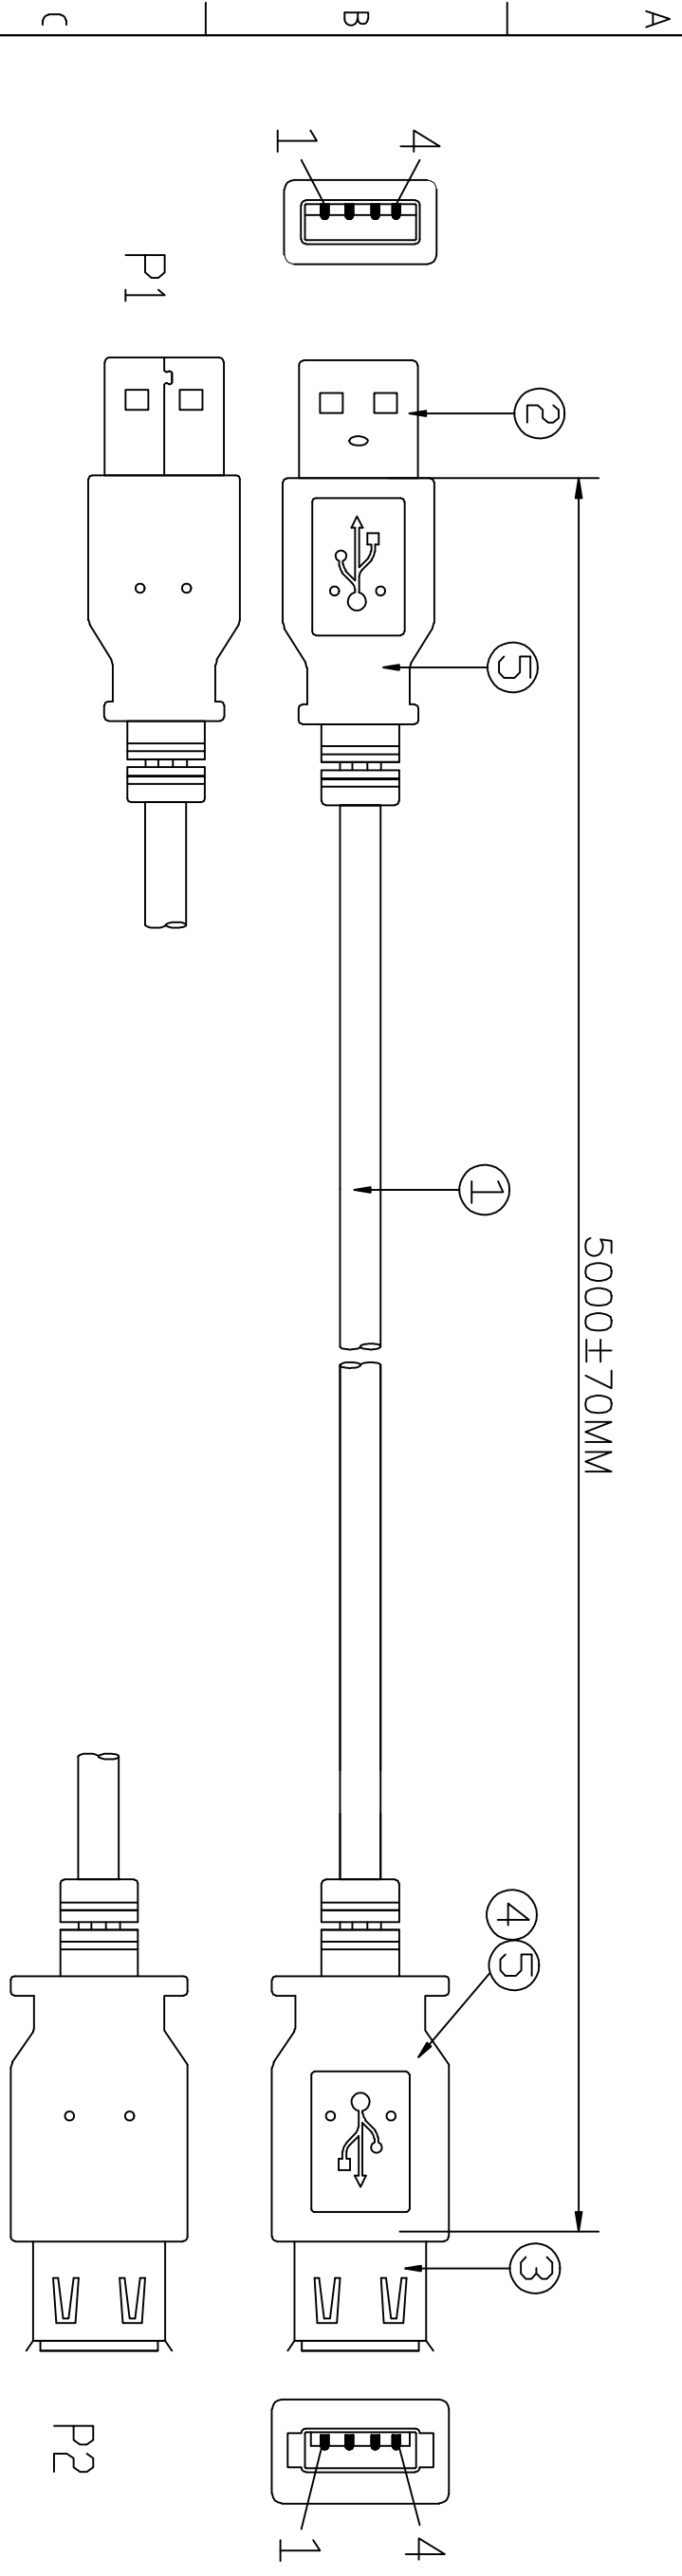

PIN OUT

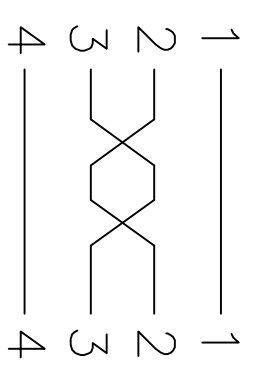

SHELL _____ SHELL

⑤	OUTER MOLDED	BLACK 45P PVC	0.021	KG
④	INTER MOLDED	LDPE	0.008	KG
③	CONNECTOR	USB A TYPE FEMALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80t 30V VW-1 USB2.0 High Speed Cable-ROHS	5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

REQUIREMENTS:

1:100% short,open and miss wire test.

2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

Lemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6,2012	File name USB AM TO AF L-5M
Date MARCH 6,2012		Scale FREE	

USB2002BK		Edition	Sheet
USB2002BK		1	1/1